

# CobaltFx Series



COPPER MOUNTAIN™  
TECHNOLOGIES



## Frequency Extender System from



COPPER MOUNTAIN™  
TECHNOLOGIES



**Farran  
Technology**

- Frequency bands from: 50-75 GHz, 60-90 GHz, 75-110 GHz

## EXTEND YOUR REACH

# Cost-effective mmWave Frequency Extension System



Farran Technology and Copper Mountain Technologies, globally recognized innovators, with a combined 50 years' experience in RF test and measurement systems have partnered to create CobaltFx, a new millimeter-wave frequency extension solution. CobaltFX is the first mmWave frequency extension solution that utilizes a 9 GHz VNA. CobaltFx's high dynamic range and directivity allow for highly accurate and stable millimeter-wave S-parameter measurements in three dedicated waveguide bands; 50-75 GHz, 60-90 GHz and 75-110 GHz. CobaltFx offers an unparalleled combination of price, performance, flexibility and size.

The VNAs used in this system are from Copper Mountain Technologies' industry leading Cobalt Series. They feature fast sweep speeds down to 0.2 microseconds per point and a dynamic range of up to 162 dB, all comprised in a compact, USB form factor. The VNAs work seamlessly with Farran Technology's millimeter-wave FEV frequency extenders.

The extenders are packaged in small and versatile enclosures that allow for flexible port arrangements with respect to the waveguide. Waveguide ports are manufactured in accordance to the new IEEE 1785-2a standard and ensure industry-leading alignment and repeatability of connection, allowing for long intervals of time between calibration. The system comes with a precision calibration kit containing flush short, offset piece and broadband load, and allows for full 12-term calibration.

Copper Mountain Technologies' USB VNAs are next generation analyzers designed to meet the needs of 21st Century engineers. Our VNAs include an RF measurement module and a processing module, a software application which runs on a Windows PC, laptop or tablet, connecting to the measurement hardware via USB interface.

This innovative approach delivers high measurement accuracy and enables users to take advantage of faster processors, newer computers and larger displays. USB VNAs have lower Total Cost of Ownership and fewer potential failure points.

These instruments are smaller and lighter, can go almost anywhere, are very easy to share and eliminate the need for data purging or hard drive removal in secure environments.

# Applications & Examples

## Antenna Range Measurements

Due to high free space loss between the transmitting and receiving antennas, near and far field antenna measurements as well as radar cross section measurements require high dynamic range and a fast-sweeping test system. During the measurement, antenna gain, pattern, efficiency and directivity can be verified, as well as parameters of a radome. Directivity and reflectivity measurements are fundamental for evaluating the backscatter parameters of the target. All these measurements can be performed by a millimeter wave S-parameter measurement system. CobaltFx offers industry-leading dynamic range and sweep time, as well as stability and ease of use.

## Material Characterization

Increase in usage of millimeter waves for high speed digital radio communications and radar sensors is driving the need for high frequency characterization of various materials: PCB laminates, antenna radomes and lenses, vehicle windscreens and various other dielectric composites. Accurate characterization is fundamental to understanding frequency-dependent dielectric constant and loss tangents that allow for better modeling of structures, shorter development times and ultimately lower cost of products. The CobaltFx system is designed to be used for various methods of material characterization – free space, transmission line and resonance type. It offers an accurate, compact and cost-effective way of understanding the impact of various materials on high frequency performance in millimeter wave components and systems.



## Wafer S-Parameter Measurements

On wafer S-parameters measurements provide for model generation of discrete semiconductor devices (diodes, transistors, mmics etc.). For accurate models, the data obtained during measurements must be accurate and the system must allow for long time intervals between calibrations. Such tasks require that millimeter-wave test equipment is stable and accurate while at the same time being compact and flexible. CobaltFx fits those two criteria perfectly.



"Frost & Sullivan analysis confirms that CMT distinguishes itself from competition by offering quality measurement VNAs that provide reliable results, yet are small, can be simply integrated into systems, and are more affordable than traditional analyzers."

**Jessy Cavazos**  
Industry Director, Frost & Sullivan



# Applications & Examples

## *5G Applications*

5G technology is considered to be a fundamental medium for the Internet of Things (IoT). It is believed that 5G will enable very diverse bandwidth usage with challenging requirements (up to 1Tb/s/km<sup>2</sup> by 2030). With 3D/4K video streaming, vast millimeter wave and smart camera sensor networks, working in the cloud, autonomous driving and mission-critical broadcasting all planned to be part of IoT, the need for bandwidth and data transmission speed has never been greater. Unlocking the high frequency part of the frequency spectrum (>50 GHz) is fundamental to this concept. Such a system will be based on small antennas operating in standalone as well as multiple user arrangements with beamforming capabilities, where amplitude and phase shift need to be very well characterized. Base stations as well as handset devices will require comprehensive discrete components as well as system level characterization. The system to be deployed and consumer devices need to comply with very strict specifications and emission requirements, but also meet low cost requirements. CobaltFx is the most cost-effective solution to enable the integration of various devices, materials, antenna beamforming and channel propagation concepts for indoor and outdoor 5G communication.


## *Benchtop DUT Characterization*

Benchtop S-parameter measurements allow for accurate and time-effective verification of packaged products. Every test laboratory in a commercial or industry orientated organization involved in production and testing of various components must have a means of evaluating their products. These normally involve DUT-type unilateral or bilateral S-parameter measurements of passive and active components, compression point measurements for amplifiers and mixers, and intermodulation distortion. The measurement domain is either frequency or time. CobaltFx allows for all these measurements and with its flexibility and compactness it easily fits on the bench. It also fits the financial constraints that every commercial organization must take into account. What all these applications have in common is that they require an accurate, compact and affordable millimeter wave test and measurement solution and CobaltFx meets all these criteria.

## *Wigig at 60 GHz*

Multi Gigabit WiFi technology operating at 60 GHz will expand capacity for indoor WiFi data transmission. With 3D and 4K video streaming within the wireless network and devices, there is a need for chipset and antenna technology to offer bandwidth and range that will reliably replace cable connectivity. Such applications put big constraints on the cost of the router as well as wireless devices. High levels of integration of various technologies, operating from single MHz to the 60 GHz range, requires very accurate and thorough characterization of consumer electronics equipment. CobaltFx is a system that allows for very cost effective, accurate and flexible verification of the product at the device or system level, allowing for low cost production.


## Automotive Radar & Sensor Testing

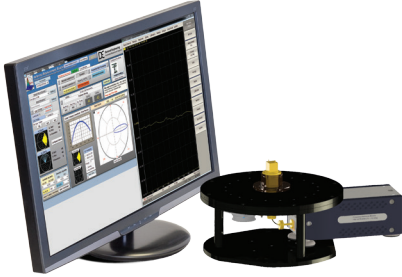

With various automotive and non-automotive radar sensors, the need for thorough characterization of devices and materials at 77 and 79 GHz has never been greater. With adaptive cruise control (ACC), collision mitigation (CM) and pedestrian detection (PD) systems already available-and autonomous driving under development-the automotive industry is in need of cost- and time-effective test solutions for radar sensors.

Also, non-automotive  
77 GHz FMCW radar




applications that cover foreign object detection, perimeter and security detection, collision avoidance and moving object detection also require test and measurement systems during their development and production. CobaltFx offers the most cost effective and flexible T&M solution for radar applications on the market.

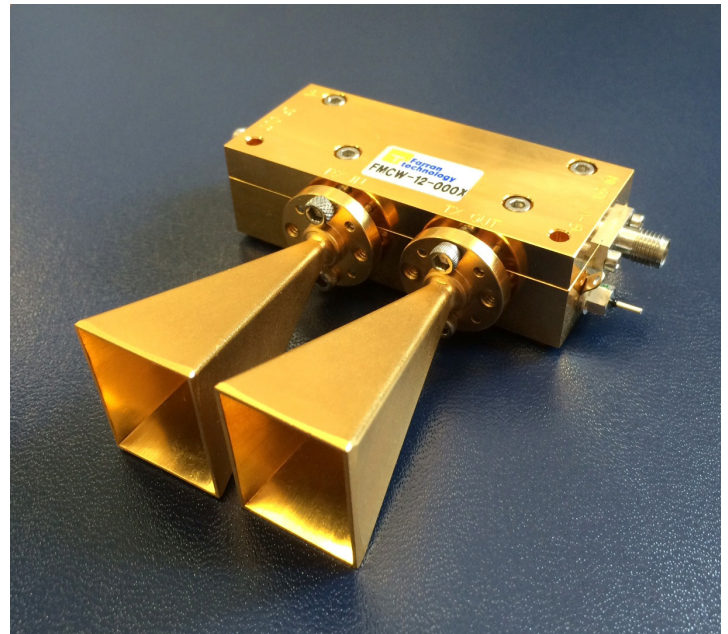

## Backhaul at 70 & 80 GHz

Backhaul radio communication is another technology that will support mobile data networks and IoT in the future. The technology provides short range 1-3 km, high speed 1-2 Gb/s radio transmission for existing mobile networks. Due to its flexibility, ease of deployment and capacity it is frequently used for point-to-point links where fiber networks are not feasible from an environmental point of view (water crossing etc.) or cost. Thorough characterization of passive and active devices (amplifiers, filters, up and down-converters, antennas) is always required as these systems must meet stringent spectrum mask requirements for licensed frequency range. CobaltFx is a system that allows for cost and time effective measurement of Backhaul components and subsystems.

# Typical Output Power Plots

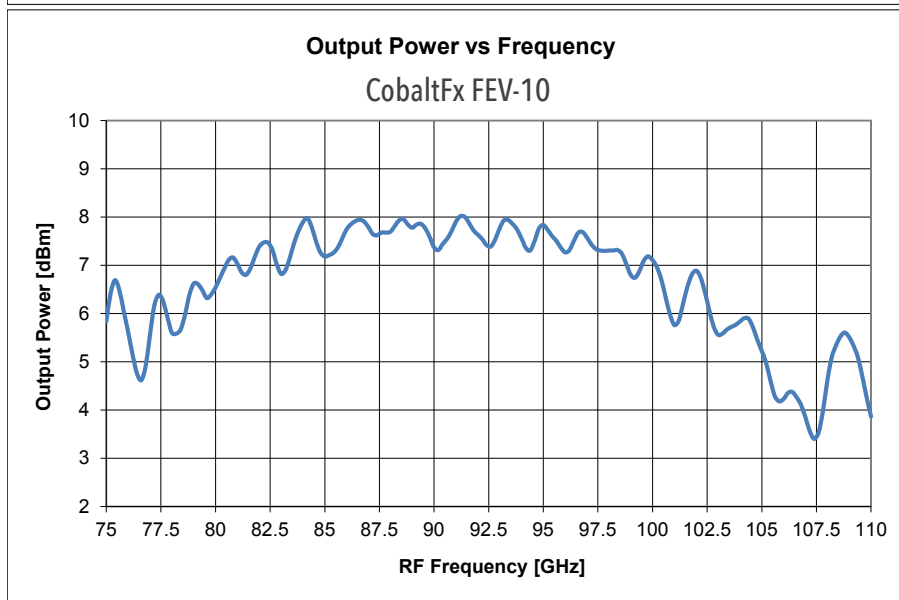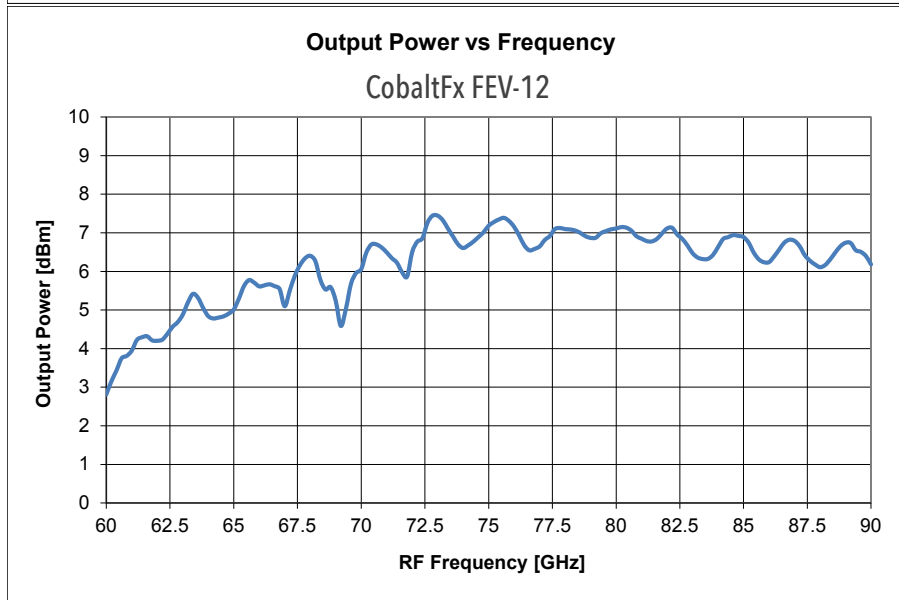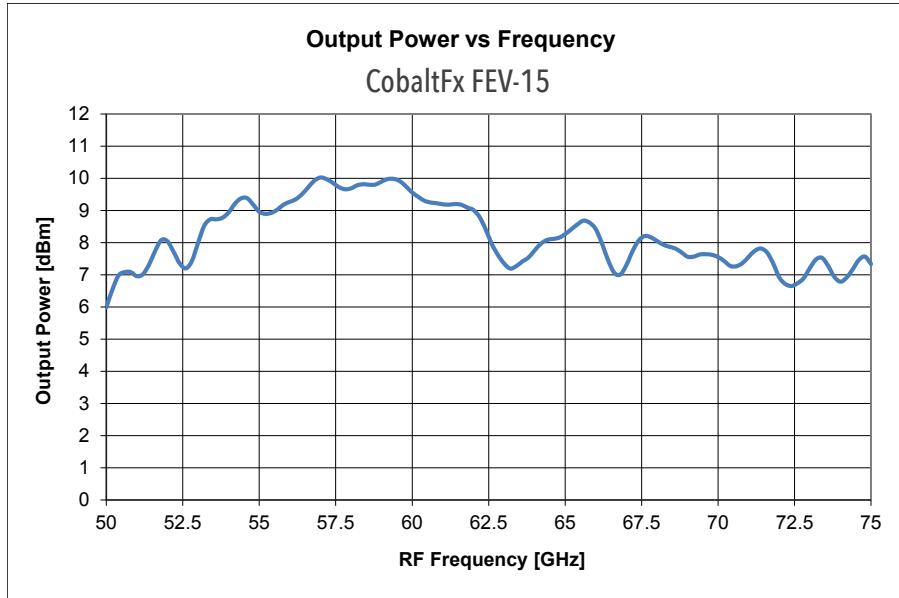


# Waveguide Calibration Kits


|                                    | FEK-15-0006                    | FEK-12-0006                    | FEK-10-0006                    |
|------------------------------------|--------------------------------|--------------------------------|--------------------------------|
| <b>Operating Frequency Range</b>   | 50 GHz to 75 GHz               | 60 GHz to 90 GHz               | 75 GHz to 110 GHz              |
| <b>Waveguide Designation</b>       | WR-15, WG-25, typ.             | WR-12, WG-26, typ.             | WR-10, WG-27                   |
| <b>Flange Type</b>                 | IEEE 1785-2a (Precision Style) | IEEE 1785-2a (Precision Style) | IEEE 1785-2a (Precision Style) |
| <b>Cut Off Frequency</b>           | 39.8765 GHz                    | 48.3692 GHz                    | 59.0143 GHz                    |
| <b>Fixed Load VSWR</b>             | < 1.035:1                      | < 1.04:1                       | < 1.04:1                       |
| <b>Flush Short Flatness</b>        | < 0.016 mm                     | < 0.012 mm                     | < 0.012 mm                     |
| <b>Operating Temperature Range</b> | 20 to 30°C (68 to 86°F)        | 20 to 30°C (68 to 86°F)        | 20 to 30°C (68 to 86°F)        |

|                              | Quantity | Quantity | Quantity |
|------------------------------|----------|----------|----------|
| <b>Broadband Termination</b> | 1 off    | 1 off    | 1 off    |
| <b>Flush Short</b>           | 1 off    | 1 off    | 1 off    |
| <b>1/4 Lambda Offset</b>     | 1 off    | 1 off    | 1 off    |

|                              | Quantity | Quantity | Quantity |
|------------------------------|----------|----------|----------|
| <b>Hex Driver 5/64" A/F</b>  | 1 off    | 1 off    | 1 off    |
| <b>Flange Screws - Short</b> | 4 off    | 4 off    | 4 off    |
| <b>Flange Screws - Long</b>  | 4 off    | 4 off    | 4 off    |
| <b>Alignment Pins</b>        | 4 off    | 4 off    | 4 off    |
| <b>USB Flash Memory</b>      | 1 off    | 1 off    | 1 off    |

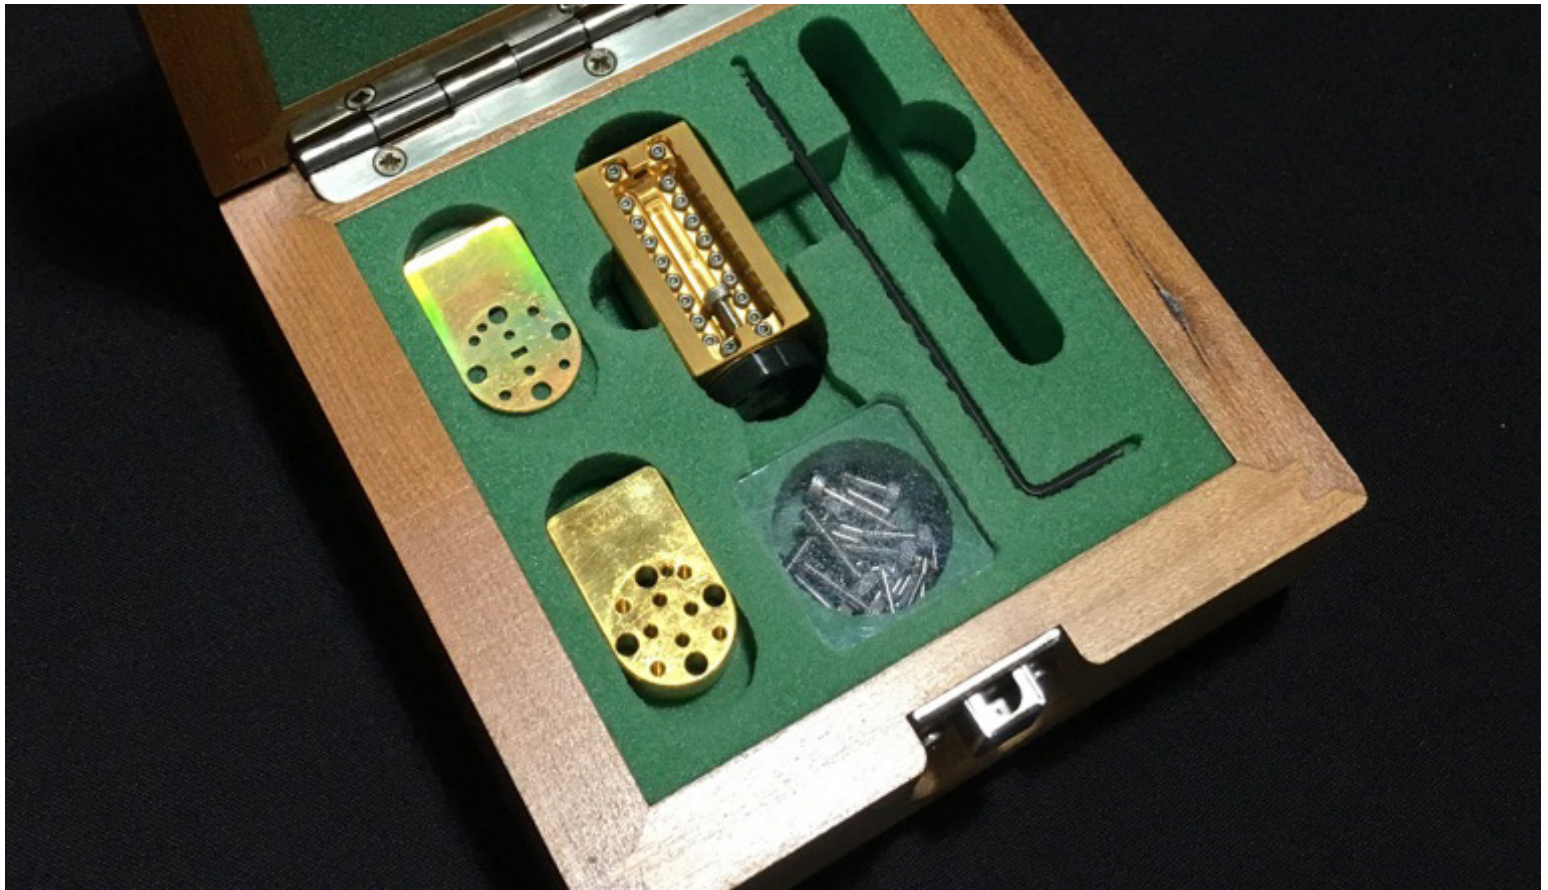

# CobaltFx FEV-15 Specifications<sup>1</sup>

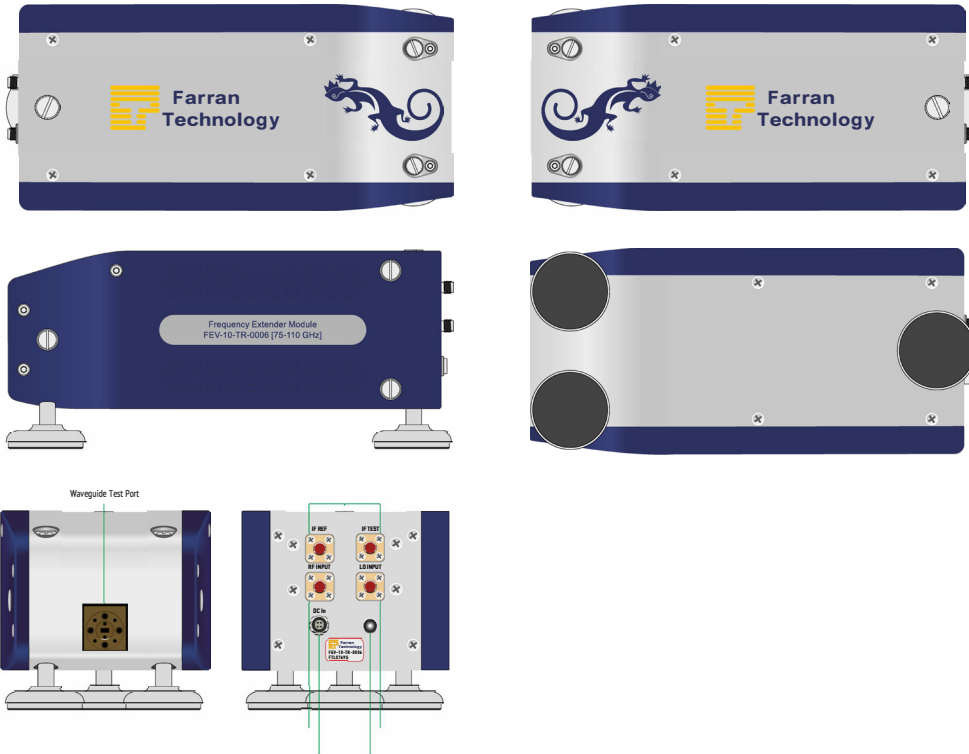

## CobaltFx FEV-15

|  |  |
|--|--|
| System Operating Frequency               | 50 GHz to 75 GHz   |
| Test Port Output Power                   | 5 dBm min., 8 dBm typ.   |
| System Dynamic Range <sup>2</sup>        | 110 dB min., 120 dB typ.   |
| Raw Coupler Directivity                  | 40 dB min., 45 dB typ.   |
| Trace Stability Magnitude <sup>3</sup>   | ±0.2 dB  |
| Trace Stability Phase <sup>3</sup>       | 2°   |
| Test Port Input 0.1 dB Compression Point | 15 dBm   |
| RF Input Frequency                       | 6.25 GHz to 9.375 GHz  |
| RF Input Power                           | 0 dBm  |
| LO Input Frequency                       | 4.17 GHz to 6.25 GHz   |
| LO Input Power                           | -5 dBm   |
| IF Output Frequency                      | 7.5 MHz  |
| Test Port Damage Level                   | +20 dBm  |
| RF/LO Port Damage Level                  | +10 dBm  |
| Test Port Interface                      | WR-15 IEEE 1785-2a compatible with UG-385/U  |
| RF/LO/IF Connector                       | SMA (F)  |
| DC Power Requirements                    | +6 V at 2200 mA  |
| Weight                                   | 3.5 kg   |
| Dimensions                               | 220 x 105 x 80 mm (8 <sup>3</sup> / <sub>5</sub> x 4 <sup>1</sup> / <sub>8</sub> x 3 <sup>1</sup> / <sub>8</sub> inches) |
| Operating temperature                    | 0°C to 30°C (32°F to 86°F)   |

[1] All specifications subject to change without notice. [2] Measured at 10 Hz IF BW  
 [3] At 23 °C +/- 5 °C after 1 hour warm-up and calibration. Assuming ideal RF and LO cables  
 © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 2017Q2



# FEV-12 Specifications<sup>1</sup> / FEV-10 Specifications<sup>1</sup>

## CobaltFx FEV-12

|  |  |
|--|--|
| System Operating Frequency               | 60 GHz to 90 GHz                                 |
| Test Port Output Power                   | 2 dBm min., 5 dBm typ.                           |
| System Dynamic Range <sup>2</sup>        | 100 dB min., 110 dB typ.                         |
| Raw Coupler Directivity                  | 40 dB min., 45 dB typ.                           |
| Trace Stability Magnitude <sup>3</sup>   | ±0.2 dB  |
| Trace Stability Phase <sup>3</sup>       | 2°   |
| Test Port Input 0.1 dB Compression Point | 15 dBm   |
| RF Input Frequency                       | 5 GHz to 7.5 GHz                                 |
| RF Input Power                           | 0 dBm  |
| LO Input Frequency                       | 5 GHz to 7.5 GHz                                 |
| LO Input Power                           | -5 dBm   |
| IF Output Frequency                      | 7.5 MHz  |
| Test Port Damage Level                   | +20 dBm  |
| RF/LO Port Damage Level                  | +10 dBm  |
| Test Port Interface                      | WR-12 IEEE 1785-2a compatible with UG-387/U      |
| RF/LO/IF Connector                       | SMA (F)  |
| DC Power Requirements                    | +6 V at 2200 mA                                  |
| Weight                                   | 3.5 kg   |
| Dimensions                               | 220 x 105 x 80 mm (8 3/5 x 4 1/8 x 3 1/8 inches) |
| Operating temperature                    | 0°C to 30°C (32°F to 86°F)                       |

## CobaltFx FEV-10

|  |  |
|--|--|
| System Operating Frequency               | 75 GHz to 110 GHz                                |
| Test Port Output Power                   | 0 dBm min., 5 dBm typ.                           |
| System Dynamic Range <sup>2</sup>        | 100 dB min., 110 dB typ.                         |
| Raw Coupler Directivity                  | 40 dB min., 45 dB typ.                           |
| Trace Stability Magnitude <sup>3</sup>   | ±0.2 dB  |
| Trace Stability Phase <sup>3</sup>       | 2°   |
| Test Port Input 0.1 dB Compression Point | 10 dBm   |
| RF Input Frequency                       | 6.25 GHz to 9.17 GHz                             |
| RF Input Power                           | 0 dBm  |
| LO Input Frequency                       | 4.688 GHz to 6.875 GHz                           |
| LO Input Power                           | -5 dBm   |
| IF Output Frequency                      | 7.5 MHz  |
| Test Port Damage Level                   | +20 dBm  |
| RF/LO Port Damage Level                  | +10 dBm  |
| Test Port Interface                      | WR-10 IEEE 1785-2a compatible with UG-387/UM     |
| RF/LO/IF Connector                       | SMA (F)  |
| DC Power Requirements                    | +6 V at 2200 mA                                  |
| Weight                                   | 3.5 kg   |
| Dimensions                               | 220 x 105 x 80 mm (8 3/5 x 4 1/8 x 3 1/8 inches) |
| Operating temperature                    | 0°C to 30°C (32°F to 86°F)                       |

[1] All specifications subject to change without notice. [2] Measured at 10 Hz IF BW  
 [3] At 23 °C +/- 5 °C after 1 hour warm-up and calibration. Assuming ideal RF and LO cables  
 © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 2017Q2

# CobaltFx Compatible Cobalt USB VNAs

## Cobalt C4209

|   |                         |
|---|-------------------------|
| Impedance                                       | 50 Ohm                  |
| Test port connector                             | N-type Female           |
| Number of test ports                            | 2                       |
| Frequency extender compatible                   | Yes; CobaltFx (2 ports) |
| Frequency range                                 | 100 kHz to 9.0 GHz      |
| Full CW Frequency                               | $\pm 2 \times 10^6$     |
| Frequency setting resolution                    | 1 Hz                    |
| Number of measurement points                    | 2 to 500,001            |
| Measurement bandwidths with 1/1.5/2/3/5/7 steps | 1 Hz to 2 MHz           |
| <b>Dynamic range</b>                            |                         |
| 100 kHz to 1 MHz; 1 Hz IF BW                    | 115 dB                  |
| 1 MHz to 8 GHz; 1 Hz IF BW                      | 158 dB/162 dB, typ.     |
| 8 GHz to 9 GHz; 1 Hz IF BW                      | 148 dB/152 dB, typ.     |
| Time per point (Typ.)                           | 10 $\mu$ sec            |
| Port switchover time (Typ.)                     | 0.2 msec                |



## Cobalt C4409

|   |                         |
|---|-------------------------|
| Impedance                                       | 50 Ohm                  |
| Test port connector                             | N-type Female           |
| Number of test ports                            | 4                       |
| Frequency extender compatible                   | Yes; CobaltFx (4 ports) |
| Frequency range                                 | 100 kHz to 9.0 GHz      |
| Full CW Frequency                               | $\pm 2 \times 10^6$     |
| Frequency setting resolution                    | 1 Hz                    |
| Number of measurement points                    | 2 to 500,001            |
| Measurement bandwidths with 1/1.5/2/3/5/7 steps | 1 Hz to 2 MHz           |
| <b>Dynamic range</b>                            |                         |
| 100 kHz to 1 MHz; 1 Hz IF BW                    | 115 dB                  |
| 1 MHz to 8 GHz; 1 Hz IF BW                      | 158 dB/162 dB, typ.     |
| 8 GHz to 9 GHz; 1 Hz IF BW                      | 148 dB/152 dB, typ.     |
| Time per point (Typ.)                           | 10 $\mu$ sec            |
| Port switchover time (Typ.)                     | 0.2 msec                |



## Cobalt C4220

|   |                         |
|---|-------------------------|
| Impedance                                       | 50 Ohm                  |
| Test port connector                             | NMD 3.5 mm Male         |
| Number of test ports                            | 2                       |
| Frequency extender compatible                   | Yes; CobaltFx (2 ports) |
| Frequency range                                 | 100 kHz to 20 GHz       |
| Full CW Frequency                               | $\pm 2 \times 10^6$     |
| Frequency setting resolution                    | 1 Hz                    |
| Number of measurement points                    | 2 to 500,001            |
| Measurement bandwidths with 1/1.5/2/3/5/7 steps | 1 Hz to 2 MHz           |
| Dynamic range                                   |                         |
| 100 kHz to 1 MHz; 1 Hz IF BW                    | 120 dB                  |
| 1 MHz to 20 GHz; 1 Hz IF BW                     | 143 dB/130 dB, typ.     |
| Time per point (Typ.)                           | 12 $\mu$ sec            |
| Port switchover time (Typ.)                     | 0.2 msec                |



## Cobalt C4420

|   |                         |
|---|-------------------------|
| Impedance                                       | 50 Ohm                  |
| Test port connector                             | NMD 3.5 mm Male         |
| Number of test ports                            | 4                       |
| Frequency extender compatible                   | Yes; CobaltFx (4 ports) |
| Frequency range                                 | 100 kHz to 20 GHz       |
| Full CW Frequency                               | $\pm 2 \times 10^6$     |
| Frequency setting resolution                    | 1 Hz                    |
| Number of measurement points                    | 2 to 500,001            |
| Measurement bandwidths with 1/1.5/2/3/5/7 steps | 1 Hz to 2 MHz           |
| Dynamic range                                   |                         |
| 100 kHz to 1 MHz; 1 Hz IF BW                    | 120 dB                  |
| 1 MHz to 20 GHz; 1 Hz IF BW                     | 143 dB/130 dB, typ.     |
| Time per point (Typ.)                           | 12 $\mu$ sec            |
| Port switchover time (Typ.)                     | 0.2 msec                |



Technology is supposed to move. It's supposed to change and update and progress. It's not meant to sit stagnant year after year simply because that's how things have always been done.

The engineers at Copper Mountain Technologies are creative problem solvers. They know the people using VNAs don't just need one giant machine in a lab. They know that VNAs are needed in the field, requiring portability and flexibility. Data needs to be quickly transferred, and a test setup needs to be easily automated and recalled for various applications. The engineers at Copper Mountain Technologies are rethinking the way VNAs are developed and used.

Copper Mountain Technologies' VNAs are designed to work with the Windows PC you already use via USB interface. After installing the test software, you have a top-quality VNA at a fraction of the cost of a traditional analyzer. The result is a faster, more effective test process that fits into the modern workspace. This is the creativity that makes Copper Mountain Technologies stand out above the crowd.

We're creative. We're problem solvers.



|                                   | FEV-15                       | FEV-12                       | FEV-10                       |
|-----------------------------------|------------------------------|------------------------------|------------------------------|
| <b>System Operating Frequency</b> | 50 GHz-75 GHz                | 60 GHz-90 GHz                | 75 GHz-110 GHz               |
| <b>Test Port Output Power</b>     | 5 dBm (Min.), 8 dBm (Typ.)   | 2 dBm (Min.), 5 dBm (Typ.)   | 0 dBm (Min.), 5 dBm (Typ.)   |
| <b>System Dynamic Range</b>       | 110 dB (Min.), 120 dB (Typ.) | 100 dB (Min.), 110 dB (Typ.) | 100 dB (Min.), 110 dB (Typ.) |

631 E. New York St | Indianapolis, IN | 46202  
[www.coppermountaintech.com](http://www.coppermountaintech.com)

USA: +1.317.222.5400  
 Singapore: +65.6323.6546