


MoTech Electronics

VARIABLE/STEP ATTENUATORS

Model MGKTSX-1-XX-28-A8-B DC-28GHz 2,10,25 Watts

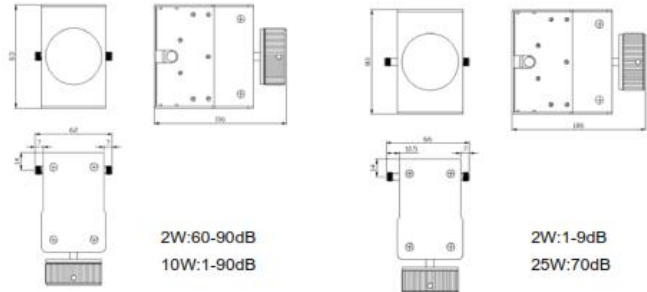

Rotary Step attenuators are used to adjust the power signal level by step within certain frequency range, they can also be used to adjust the test system's power level as inset attenuators, it is small with high accuracy and high stability etc.

MGKTSX-1-XX-28-A8-B type rotary step attenuators' average power 2W,10W,25W frequency range from DC-28GHz, attenuation value 0-90dB by 1dB/10dB step.

MECHANICAL SPECIFICATIONS

Connectors	Male Pin	Female Pin	Housing	Temp Range	Dimensions	Weight
Brass Nickel Plated	Brass Gold Plated	Beryllium Copper Gold Plated	Aluminum Anodic Oxidation	0°C~+54°C	62×106×83mm 66×106×83mm	525g 520g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Step Size	Max VSWR	Insertion Loss(dB)	Attenuation Accuracy(dB)
MGKTS2-1-9-18-A8-B	DC-18	0-9dB in 1dB steps	1.6	≤1.0	±0.5dB
GKTS2-1-9-26.5-A8-B	DC-26.5		1.7	≤1.8	±1.0dB
MGKTS2-1-70-18-A8-B	DC-18	0-70dB in 10dB steps	1.6	≤1.0	±1.5dB or 4%
MGKTS2-1-60-26.5-A8-B	DC-26.5	0-60dB in 10dB steps	1.75	≤1.8	±1.5dB or 4%
MGKTS2-1-90-8-A8-B	DC-8	0-90dB in 10dB steps	1.6	≤1.0	±1.5dB or 4%
MGKTS2-1-90-12.4-A8-B	DC-12.4				
GKTS2-1-90-18-A8-B	DC-18				
GKTS10-1-9-18-A8-B	DC-18	0-9dB in 1dB steps	1.6	≤1.0	±0.5dB
GKTS10-1-9-26.5-A8-B	DC-26.5		1.7	≤1.8	±1.0dB
GKTS10-1-9-26.5-A8-B	DC-28		1.75	≤1.8	±1.5dB
MGKTS10-1-70-18-A8-B	DC-18	0-70dB in 10dB steps	1.6	≤1.0	±1.5dB or 4%
MGKTS10-1-60-26.5-A8-B	DC-26.5	0-60dB in 10dB steps	1.75	≤1.8	±1.5dB or 4%
MGKTS10-1-90-8-A8-B	DC-8	0-90dB in 10dB steps	1.6	≤1.0	±1.5dB or 4%
MGKTS10-1-90-12.4-A8-B	DC-12.4				
GKTS10-1-90-18-A8-B	DC-18				
MGKTS25-1-70-18-A8-B	DC-18	0-70dB in 10dB steps	1.6	≤1.0	±1.5dB or 4%
MGKTS25-1-70-26.5-A8-B	DC-26.5		1.75	≤1.8	
MGKTS25-1-70-28-A8-B	DC-28		1.75	≤1.8	

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 2W,10W,25W

PEAK POWER: 200W (5μs pulse width with 0.5% duty cycle)

CONNECTOR TYPE: 3.5mm(F,F), SMA(F,F)(DC-18GHz)

Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy